


# GM25-5 Portable Gas Analyser



The GM25-5 portable gas analyser makes all work steps as easy as possible for you. It is a fixed configuration, measuring the proportions of gases presented in greenfield and brownfield sites, as well as land affected by landfill operations or other contamination. Operation is extremely simple, yet the readings obtained are comprehensive and accurate.

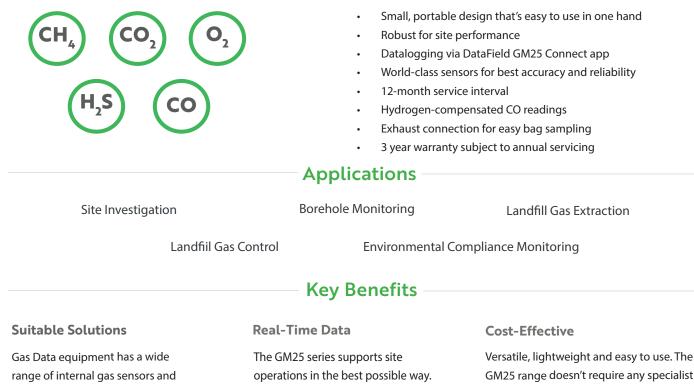

external attachments, giving you the choice and freedom to purchase your monitoring solution tailored to your operations. The GM25 series supports site operations in the best possible way. Quickly and easily, it captures information in just a few minutes, giving you visibility of the production and quality of the gases. Versatile, lightweight and easy to use. The GM25 range doesn't require any specialist knowledge, delivering valuable data at your fingertips. A 2-4 hour charge provides 8 hours of continuous use.



(2) +48 81 740 33 45

info@atut.lublin.pl





### **GM25 Connect App**

The GM25 series can be used by itself or in combination with the GM25 Connect app which allows the GM25 analyser to be controlled via a mobile device or tablet. This results in faster operations whilst being able to configure how readings are taken suiting the individual users needs. If an internet connection is present, the application can live-stream the data to the web-based portal as opposed to downloading it directly from the device after all readings have been taken, resulting in much faster access to the gas analysis data.

### **Technical Specifications**

General				
Rating	ATEX, IECEX, UKEx 😥 II 2 G Ex ib IIB T1 Gb			
Dimensions	260mm x 100mm x 75mm			
Weight	1.1kg			
Ambient Temperature Range	-10°C to 40°C			
Aspiration Rating (minimum)	300ml/min			

#### Gas Measurements

Channel	Sensor Type	Range	Resolution	Accuracy After Calibration
CH4	IR	0-100%	0.1%	± 3.0% (vol.) 0-100% ± 1.0% (vol.) 55%-75%
CO2		0-100%	0.1%	± 3.0% (vol.) 0-100% ± 1.0% (vol.) 25%-45%
02	EC	0-25%	0.1%	± 0.5% (vol.)
H2S		0-10,000ppm	10ppm	± 5.0% (of reading) or 75ppm (whichever is greater)
СО		0-2000ppm	1ppm	± 5.0% (of reading) or 75ppm (whichever is greater)
LEL (indication only)	Colouistica	0-100%	0.1%	
Balance	Calculation	0-100%	0.1%	

 Pressure Measurements

 Atmospheric

 Static

 800 to 1200mB

 1mB

 ± 5mB

 ± 200mB

 0.2mB

 ± 2mB



## GM25-5 Portable Gas Analyser



### Optional Measurements

Velocity	Vane Anemometer	0.7-40m/s	0.1m/s	± 0.5 m/s			
Temperature	Thermistor	-10-100ºC	0.5ºC	± 2.0°C			

All GM25 gas analysers are available to hire or purchase. Please contact our team for details.

#### GM25-5 Specific Features

- Storage of 2 water level readings from water level dipmeter taken at each borehole
- Manual data storage and programmable unattended data logging functions
- 3 tier hierarchical 24 character alphanumerical labels for the naming of stored reading set



## Servicing | Gas Data gas analysers are required to have a service every 12 months

Advantages of our Annual Servicing & Calibration offering are:

- Complete service of your instrument including, replacing any faulty parts or parts nearing the end of their life
- Recalibration of the instrument
- Highly experienced servicing team, equipped to service, calibrate and repair your instruments worldwide
- Excellent customer service and response time
- Hire fleet available at an additional cost to cover the period that your instrument is in service (UK addresses only subject to availability)
- 12-month warranty covering any parts required This is intended to cover internal component failures. Faults caused by negligence, accident, physical damage, missing parts e.g. (gas filters and batteries), will not be repaired free of charge, but cost estimates will be supplied for approval before any work is done
- Gas Data arranged collection and delivery of your instrument (UK addresses only)

